


# SNAP™ Quick Connect Cutting Rod System

**BROCO®**

New from Broco®, the forced entry torch leader

**SNAP™ Quick Connect Cutting Rod System – Fits all Broco® torches, For 3/8" and 1/2" diameter cutting rods.**

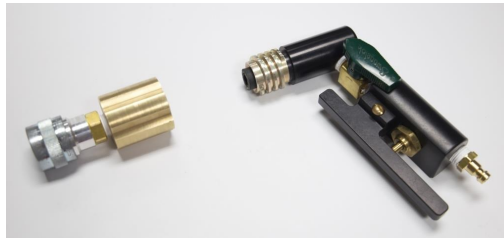


Advantages for our quick connect setup are speed, positive engagement (a quick click and the rod is locked into place), no oxygen leaks, and easy removal (no more pulling a hot rod stub from the collet).

- **Cutting rods press in to 'SNAP™' fittings by hand**
- **Push 'SNAP™' rods into the coupler to attach**
- **Twist coupler collar to remove**
- **Fastest way to change cutting rods**
- **Eliminates oxygen leaks**
- **Positive engagement**
- **Rod fittings are reusable**



Another benefit for all our maritime users is the quick connect tips are aluminum so won't corrode/rust. When put on the rods at the time they go on the boat, the rest of the rod may rust from exposure while the tips stay clean and functional. (We've talked to customers who have had to clean rod ends so they fit the collets. That should become a thing of the past.

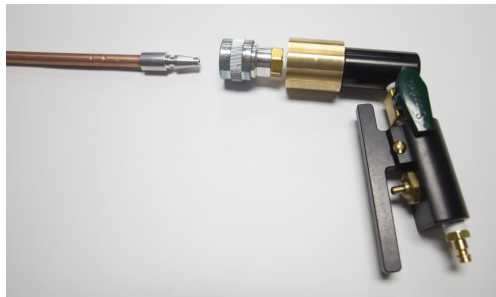

And specific to the Broco quick release, the coupler is fairly large making it easy to grip and twist while wearing gloves. And because it is twist-lock (twisting in the same direction as tightening so the collet nut doesn't accidentally loosen) it doesn't have the roller balls under the collar so won't get messed up by dirt or corrosion as easily.

**PC/SNAPNUT torch nut with quick connect coupler**  
**PC/SNAPFIT38-25 cutting rod end fittings to fit 3/8" diameter cutting rods. (Bag of 25 pieces.)**  
**PC/SNAPFIT12-25 cutting rod end fittings to fit 1/2" diameter cutting rods. (Bag of 25 pieces.)**



*A quick twist ejects the old rod stub.*

**BROCO®**

400 S. Rockefeller Ave., Ontario, CA 91761 U.S.A. Tel: 909 483 3222; 800 845 7259 Fax: 909 483 3233  
Email: Sales@Brocoinc.com www.Brocoinc.com